

# SPECIFICATIONS




Controls.....	Footswitch (Loop 1 or Tuner on/off) Footswitch (Loop 2 on/off) Toggle Switch (Tuner Mute on/off)
Indicators.....	Blue LED (indicates Loop 2 on) Yellow LED (indicates Loop 1 or Tuner on)
Connectors.....	Input Output 1 or T Send 1 Return 2 Send 2 Return
Power Supply.....	AC adaptor (use Boss-style center pin negative {-} 9V DC: Optional)
Dimensions.....	4.39(W) x 2.34(D) x 1.19(H) inches (footswitches add about 5/8" to H)
Weight.....	about 11 oz
Accessories.....	Owner's Manual Rubber feet (4) (optional)



[www.smolskitech.com](http://www.smolskitech.com)

© 2008 SmolскиTech

*Owner's Manual*

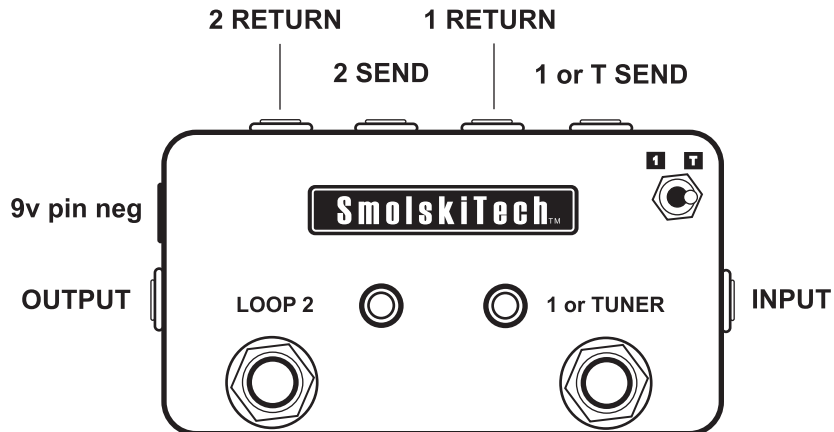

**INPUT** - connect to guitar or effect before Loop or Loop before Loop

**OUTPUT** - connect to amp or another Loop

**1 or T SEND** - connect to first pedal (in Loop 1) input, or Tuner input

**1 RETURN** - connect to last pedal (in Loop 1) output

**2 SEND** - connect to first pedal (in Loop 2) input

**2 RETURN** - connect to last pedal (in Loop 2) output

\* Use the SmolскиTech Dual Loop anywhere to eliminate loading down of signal. For use where you experience loss of tone and/or volume while pedal/s are bypassed (or off). Loop 1 is wired in series with Loop 2 (1 then 2). With toggle set to T, and yellow LED on, Output is grounded for tuning. With toggle set to T, and Blue and Yellow LEDs on, 2 Send is lifted for tuning. Set Tuner Mute toggle switch to T for tuner mute, set toggle to 1 for Loop 1 operation.